


ETF 2100

ECOWATER SERIES • WATER FILTRATION SYSTEM

It's That Good.®

A Proven System for Removing Iron and Treating Problem Water

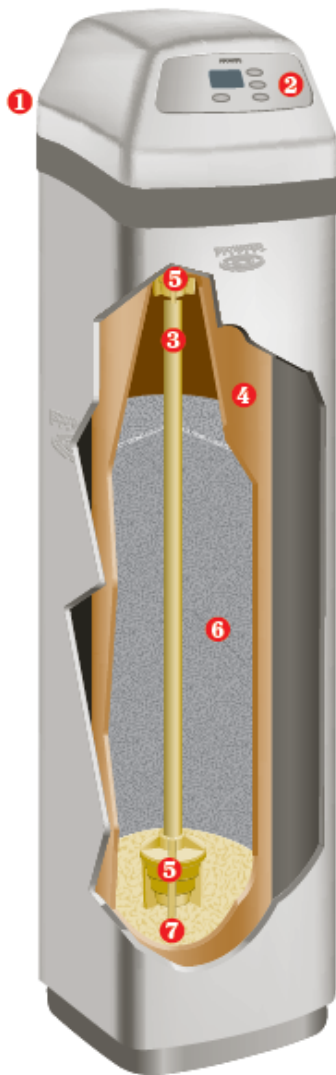

- 1 Bypass Valve (optional)**
Brass-free and lead-free bypass valve lets you manually bypass the system.
- 2 Electronic Timer Controls**
Electronic timer controls regeneration frequency. Full menu-driven options.
- 3 Full One-Inch Riser**
One-inch diameter for increased flow rates, which ensures that household demand is adequately met.
- 4 Multi-Wrap Fiberglass Reinforced Media Tank**
Durable fiberglass-wrapped exterior for strength. Doesn't deteriorate, rust, or corrode.
- 5 Self-Cleaning Distributors**
Distributors exhibit excellent flow rates and are cleaned automatically by counter-current water pressure.
- 6 Choose Media for Custom Application**
- 7 Washed Quartz Underbedding**
Washed quartz doesn't impart hardness into softened water and allows for more powerful "piston effect" during counter-current cycles.

Fully Ported One-Inch Valve with Easy-Clamp Ring and Patented Teflon® Disc

24-Volt Transformer – ENERGY STAR® Qualified
Simplifies installation, maintenance and reduces electrical hazards.



*Teflon is a registered trademark of DuPont.




ECOWATER.COM

ETF 2100 (PF10 and PF12, IF10)

DIMENSIONS

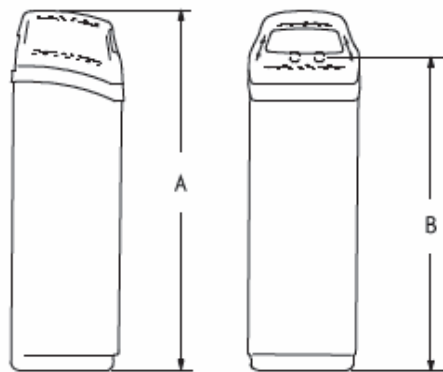

For ETF 2100-IF-10 Only.



	ETF 2100 IF10 & PF10	ETF 2100 PF12
Nominal Resin Tank Size	10" Dia. x 47"	12" Dia. x 54"
A	57"	62.5"
B	50"	55.75"



SPECIFICATIONS

Multi-purpose Filters (3 media choices)

	ETF 2100 - PF10	ETF 2100 - PF12
<i>Sediment Removal</i> Service Water Flow Rate (gpm)	4	4 – 8
Type of Media: Filter Aggregate Contaminant Limits	Based on water analysis	
<i>Acid Neutralizer</i> Service Water Flow Rate (gpm)	8	8
Type of Media: Neutralite Lower pH Limit	6.0	6.0
<i>Taste and Odor Removal</i> Service Water Flow Rate (gpm)	8	8
Type of Media: Activated Carbon Contaminant Limits	Based on water analysis	
Amount Media Recommended (cu. ft.)	1 to 1½	2
Amount Washed Quartz (lbs.)	17	29
Supply Water Pressure Limits (psi)	20 – 125	20 – 125
Supply Water Temperature Limits (°F)	35 – 120	35 – 120
Minimum Inlet Water Flow (gpm) – Required for Backwash and Fast Rinse on media listed above.*	5	7

*Check with media manufacturer for other media requirements.

Iron Filter

ETF 2100 - IF10

Iron Removal (media)	Birm (Ferrite) or Manganese Treated Green Sand
Iron Removal Limits (ppm)	20
Amount Media Recommended (cu. ft.)	1 to 1½
Service Water Flow Rate (gpm)	8
Supply Water Pressure Limits (psi)	20 – 125
Supply Water Temperature Limits (°F)	35 – 120
Minimum Inlet Water Flow (gpm) – Required for Backwash and Fast Rinse on media listed above.*	7
Media Regenerate Material	Potassium Permanganate
Amount Used Each Recharge (oz.)	2



EcoWater Systems LLC
P.O. Box 64420
St. Paul, MN 55164-0420
www.ecowater.com

EcoWater Systems Ltd.
#1 Independent Bus. Pk. Mill Rd.
Stokenchurch, Bucks
United Kingdom HP14 3TP



Powered by an ENERGY STAR® qualified adapter for a better environment.



EcoWater Canada Ltd.
5240 Bradco Blvd.
Mississauga, Ontario
Canada L4W 1G7

EcoWater Systems Europe N.V.
Geelseweg 56
2250 Olen
Belgium

Kunshan EcoWater Systems Company, Ltd.
483 San Xiang Road
Kunshan Economic & Technical
Development Zone
Kunshan, Jiangsu Province, PRC 215335



A member of The Marmon Group of companies

0602405 (Rev. F) 3/07

Printed in the U.S.A.

© 2007 EcoWater Systems LLC

ECOWATER.COM